

SEC 3500 HMI Operator Interface

Hardware Manual



Sensor Electronics Corporation
12730 Creek View Avenue
Savage, Minnesota 55378 USA
(952) 938-9486 Fax (952) 938-9617
Email sales@sensorelectronic.com

Commitment

Our quality and service are uncompromising. We back each of our products with a two-year warranty on all materials and workmanship. We offer technical support, user training and on-site service and maintenance of equipment to meet the needs of our customers.

Gas Detection Service

Individually designed maintenance packages are available for specific customer needs. Service begins with verification of the system installation that includes an initial system check and calibration. We then offer customer training programs (on-site and at factory) to insure that technical personnel fully understand operation and maintenance procedures. When on-the-spot assistance is required, service representatives are available to handle any questions or problems immediately.

Warranty

Sensor Electronics Corporation (SEC) warrants products manufactured by SEC to be free from defects in workmanship and materials for a period of two (2) years from date of shipment from the factory. Any parts returned freight pre-paid to the factory and found defective within the warranty would be repaired or replaced, at SEC's option. SEC will return repaired or replaced equipment pre-paid lowest cost freight. This warranty does not apply to items, which by their nature are subject to deterioration or consumption in normal service. Such items may include:

Fuses and Batteries.

Warranty is voided by abuse including rough handling, mechanical damage, alteration or repair. This warranty covers the full extent of SEC liability and SEC is not responsible for removal, replacement costs, local repair costs, transportation costs or contingent expenses incurred without prior written approval. Sensor Electronics Corporation's obligation under this warranty shall be limited to repair or replacement of any product that has been returned to Sensor Electronics Corporation for warranty consideration. This warranty is expressly in lieu of any and all other warranties expressed or implied, and all other obligations or liabilities on the part of Sensor Electronics Corporation including but not limited to, the fitness for a particular purpose. In no event shall Sensor Electronics Corporation be liable for direct, incidental, or consequential loss or damage of any kind connected with the use of its products or failure to function or operate properly.

SEC P/N: 1460014	
Rev / ECO: A / 000209	Page 2 of 26

Table of Contents

Contents

I. SPECIFICATIONS	5
II. GENERAL DESCRIPTION	6
III. OPERATION	7
IV. INSTALLATION	8
V. DRAWINGS	9
VI. TESTING	25
VII. MAINTENANCE	26

Revision History

Rev	Date	ECO	Description of Change	Page
032113	03/21/13	-	Initial Release	
1	9/20/2016	-	Update to Current P/N Scheme Update Specifications Add Installation Steps Add Testing Add Maintenance Add UL2017 Information	All
2	10/26/2016	-	Change model to SEC3500 HMI Add all Components Inside Enclosure to Specs Add Recommended Power Supply Add Earth Ground Callout to Page 9 Add Note about ISO Comm on Repeaters Add Part about SEC3500 HMI Being the System	All
A		000209	UL2017 Approved	All

I. SPECIFICATIONS

Model: SEC3500 HMI

Interface

RS485 Port: Interactive "Modbus" (expandable to two)

RS232 Port: "Statcast" System parameter broadcast

Ethernet Port: Remote Screen Access

16 Programmable Relays (expandable to 40)

Construction: Powder Coated Steel

Dimensions: 16" X 16" X 10"

Weight: 45lbs

Operating Temperature Rating:

0° to +50°C at 0 to 99% RH (non-condensing)

Operating Voltage: 19 to 29 VDC 

Power Consumption: 40 Watt Max. (Not including relay contact current or 24VDC power supplied to external devices)

Relay Contacts: 1 NO, 1 NC per Relay.

Contact Rating: 8A @ 30VDC, 8A @ 250VAC

Type AM System

System Components:

SEC 3500 Operator Interface (Red Lion HMI)

SEC 3100 Gas Transmitter (Not UL 2017 Approved)

SEC 3500 - XX Relay Controller

SEC 3100 AIM Interface Module (Not UL 2017 Approved)

SEC 3100 LIM Interface Module (Not UL 2017 Approved)

SEC 3100 ISO Repeater

SEC 3500 Enclosure

Circuit Breaker

DC to DC Converter 12-24V to 24V 1A

Approvals: CSA: C22.2 No 0, No 0.4-04, No 14-05, No 142
UL 508

ETL: 5002065 UL 2017 (SEC3500 HMI, whole system)

Installation Category: Cat. I, Pollution Degree 2

RS485 Max Line Impedance: ~100-140Ω

Recommended Power Supply: IDEC PS5R-SD24

Input: 100 to 240VAC Output: 24V 2.5A Power Supply

Other supplies may be used as long as they are class 2 power supplies

SEC P/N: 1460014	
Rev / ECO: A / 000209	Page 5 of 26

II. GENERAL DESCRIPTION

CONVENTIONS

The following conventions are used in this manual.



Warning Statement



VDC (DC Voltage)

SEC 3500 HMI

The SEC3500 HMI Operator Interface, an Attendant-Monitored system, continuously interrogates up to 254 system devices over the 9600 baud RS485 Modbus Interface. The OI, operating as the Modbus Master, can communicate with any SEC3XXX Device and any 4-20 transmitter via the SEC3100AIM.

There is a power indicator LED located on the front panel of the 3500.

Network devices can be interrogated, configured, and calibrated using the password protected touchscreen user interface.

16 embedded programmable relays provide external device control/interface based on network events. Additional relays can be located anywhere on the network (groups of 8).

The Statcast RS232 interface continuously scrolls through system operating status. (Read only for the user)

An Ethernet port allows remote access to system screens.

The SEC3500 HMI refers to the system as a whole, not just the SEC3500 (what is inside the metal enclosure).



WARNING: SUBSTITUTION OF COMPONENTS MAY IMPAIR SAFETY

SEC P/N: 1460014	
Rev / ECO: A / 000209	Page 6 of 26

III. OPERATION

The SEC3500 HMI Operator Interface is an intuitive operator interface. For the individual page operations please refer to the following individual instruction manuals on the SEC website:

3500 OI Basic Operators Guide.pdf


3500 OI Startup Basics Guide.pdf

StatCast.pdf

IV. INSTALLATION


1. Mounting Instructions:
 - a. Find an accessible spot for the SEC 3500 to be mounted. This spot should have enough room for incoming/outgoing wires to be easily routed around. The SEC 3500 should be accessible at a regular height so the monitor can be easily accessed at all time alarms. Make sure the monitor is in a safe location in case of alarm.
 - b. The SEC 3500 needs to be mounted on a solid wall
 - c. Recommended Hardware:
 - i. Use all 4 mounting brackets when mounting the SEC 3500
 - ii. Bolts: minimum of ¼" – 20 thread, 1 ½" long
 - iii. Nuts: ¼" – 20 Thread ½" Wide
 - iv. Washers: Minimum 0.260" ID, 0.750" OD for washers between the bolt head and the SEC 3500. Maximum 0.375" ID, Minimum 1.50" OD for washers between mounting wall and bolt
2. The SEC 3500 requires an 18-29V DC power supply. **This power supply must cover Class 2 requirements as well as be UL 1310 approved.** Then run the power through the bottom-left hole of the SEC 3500 unit. Then connect the power supply to the DC-to-DC converter.
3. Run the RS485 (Data Highway) through the bottom-left side hole of the SEC 3500. Then attach to the data highway to the proper terminals on the terminal block.
4. When connecting 120 VAC (Class 1) circuits to the SEC 3500, wires should be routed through the top-right opening. Then all class 2 and 3 power circuits going to the relay switches should go through the bottom-left opening. Class 1 wires must be kept at least 1/4" inches away from class 2/3 circuits.
5. Relay controller labeled 253 in the SEC3500 HMI housing has relay 1 designated for the alarm horn.
 - a. The horn needs to be supplied with +24VDC.
6. Sensor Electronics recommends not connecting earth ground and DC common together. Instead connect earth ground to the bolt inside the enclosure. It is located inside the enclosure on the bottom left and is connected to the panel door.
7. **For the UL2017 approval, all wiring that interconnects equipment must be located within the same room.**

***NOTE: COM ON THE SEC 3100 ISO REFERS TO THE ISO COMMON, NOT DC COMMON**

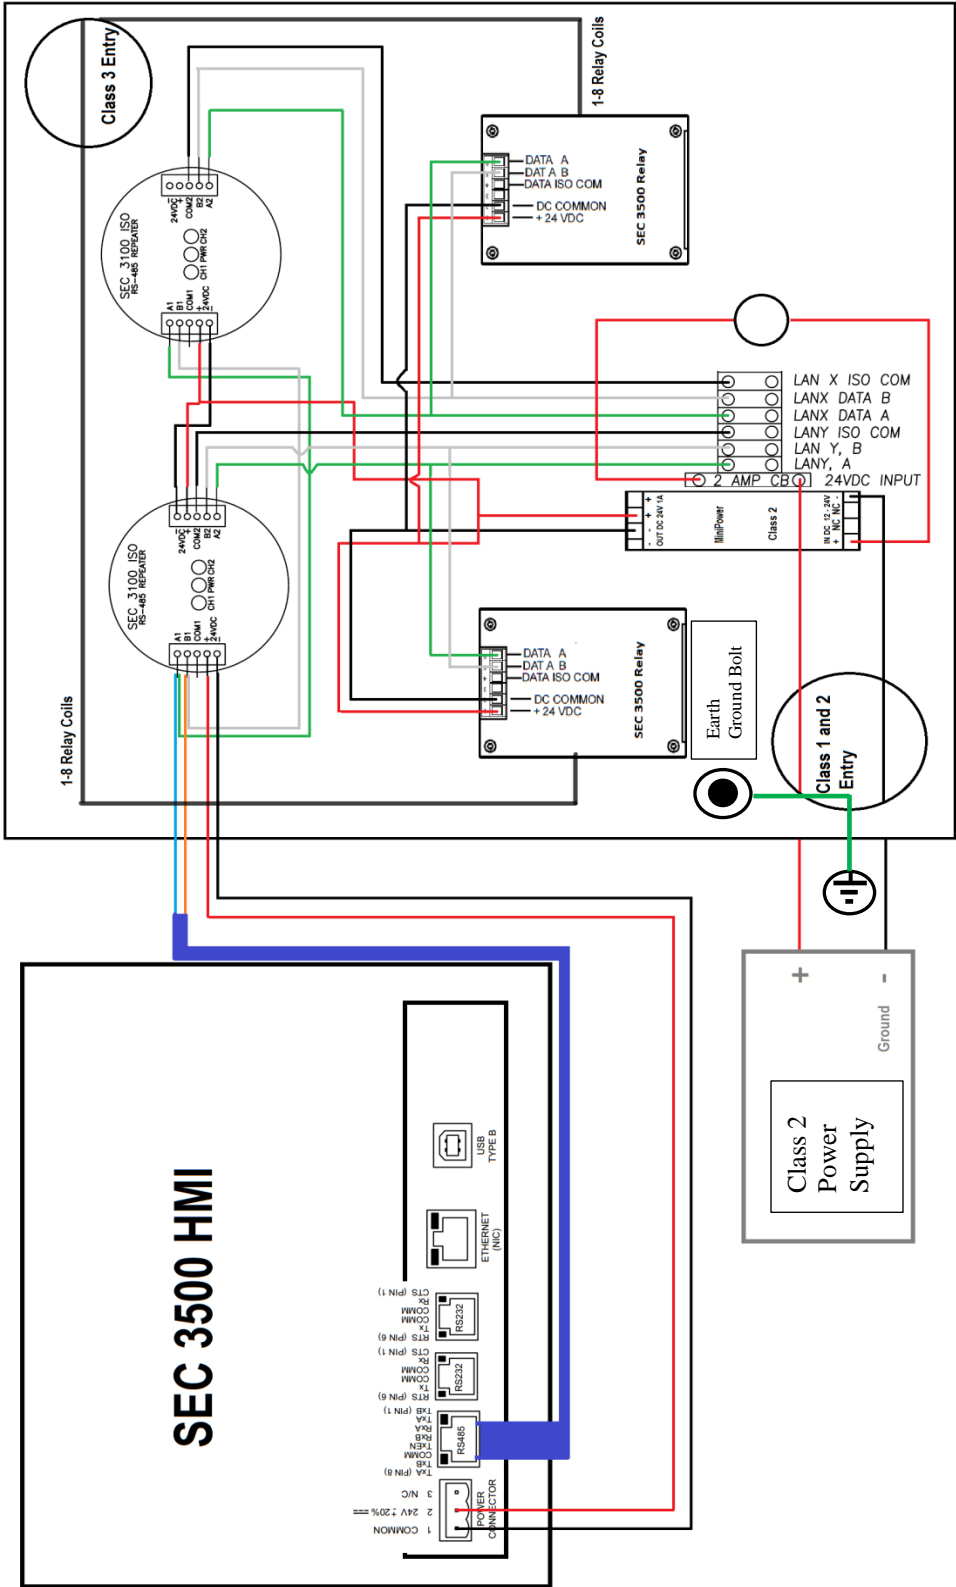


V. DRAWINGS


Part Number	Description
1421901	Mounting and Dimensional Drawing
350000016X16X10	Internal Component Layout
1460015 (separate document)	Overall Wiring Diagram
-	Wiring Examples




WIRING TERMINATION

The wiring diagram is for the input power to the SEC 3500 and RS485 Data Highway Connection.

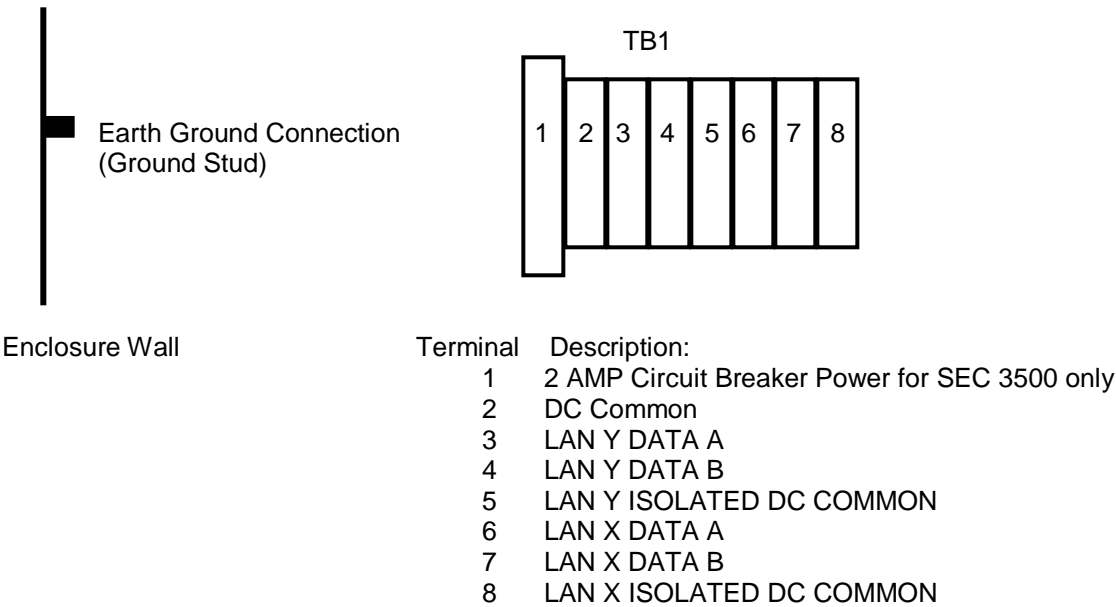


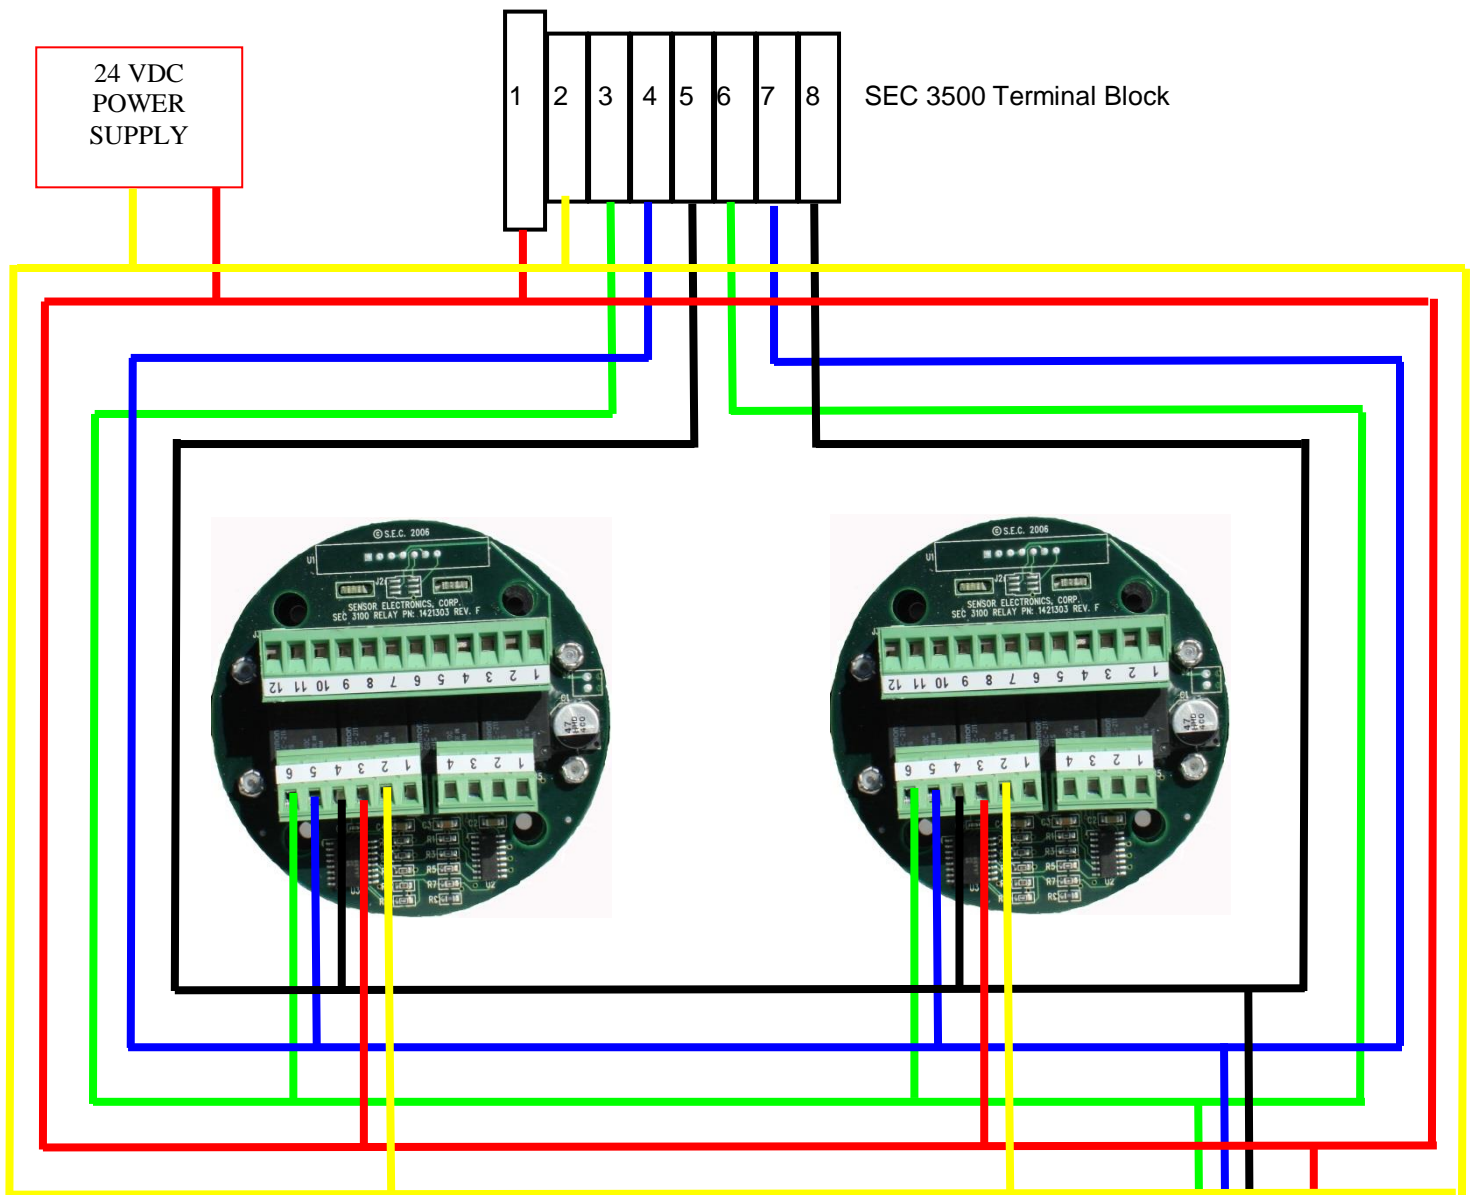

**WIRING EXAMPLE:
SEC 3500 TO SEC 3100
TRANSMITTERS AND SEC 3500 – 8
RELAY CONTROLLER**

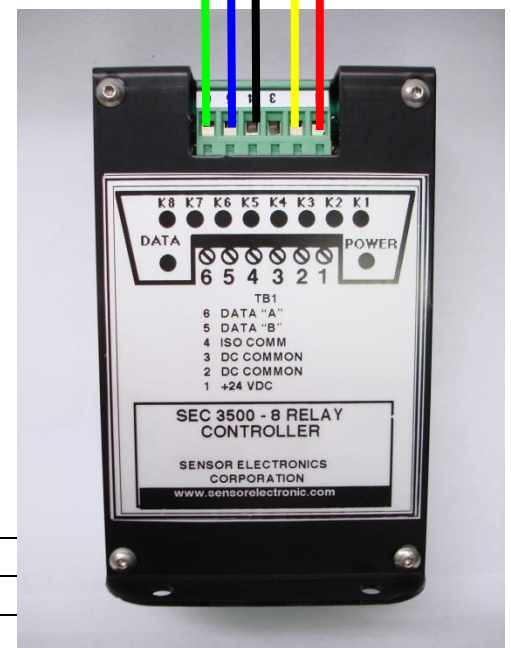

SEC P/N: 1460014	
Rev / ECO: A / 000209	

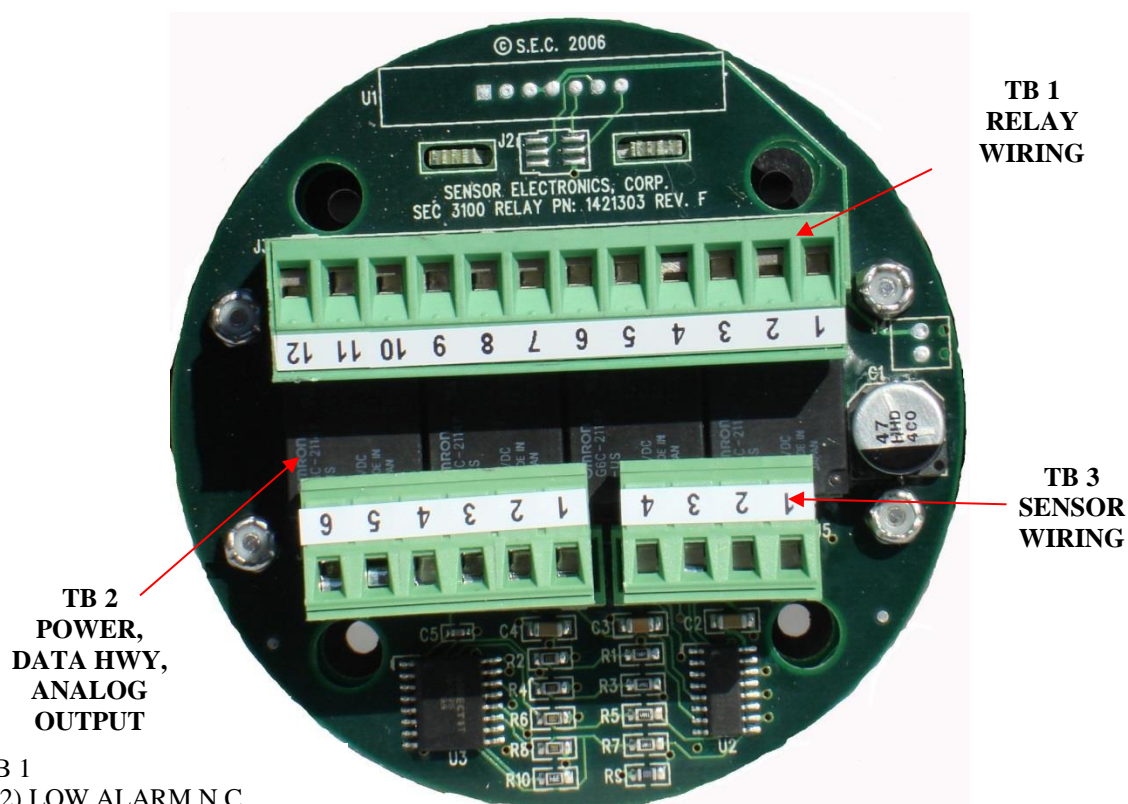

**TB 2
POWER,
DATA HWY,
ANALOG
OUTPUT**

- TB 1**
 (12) LOW ALARM N.C.
 (11) LOW ALARM COMMON
 (10) LOW ALARM N.O.
 (9) MID ALARM N.C.
 (8) MID ALARM COMMON
 (7) MID ALARM N.O.
 (6) HIGH ALARM N.C.
 (5) HIGH ALARM COMMON
 (4) HIGH ALARM N.O.
 (3) FAULT (N.E.) N.C.
 (2) FAULT (N.E.) COMMON
 (1) FAULT (N.E.) N.O.

- TB 2**
 (1) 4-20 mA ANALOG OUTPUT
 (2) DC COMMON
 (3) +24 VDC
 (4) DATA ISO COMMON
 (5) RS485 DATA B
 (6) RS485 DATA A

- TB 3**
 (1) WHITE
 (DATA/CAL)
 (2) BLUE OR GREEN
 (4-20 mA)
 (3) RED
 (+24 VDC)
 (4) BLACK
 (DC COMMON)

SENSOR ELECTRONICS CORPORATION
 12730 CREEK VIEW AVE
 SAVAGE, MINNESOTA 55378 USA
 (T) 952.938.9486 (F) 952.938.9617
 sales@sensorelectronic.com

BACK VIEW OF SEC 3100
SEC 3100 WIRING

SEC P/N: 1460014

Rev / ECO: A / 000209


Page 15 of 26

TB 1 Relay

- 1 High Alarm N.C.
- 2 High Alarm
- 3 High Alarm N.O.
- 4 Fault N.O.
- 5 Fault
- 6 Fault N.C.

Wiring TB 2 Relay Wiring

- 1 Low Alarm N.C.
- 2 Low Alarm Common
- 3 Low Alarm N.O.
- 4 Mid Alarm N.C.
- 5 Mid Alarm Common
- 6 Mid Alarm N.O.

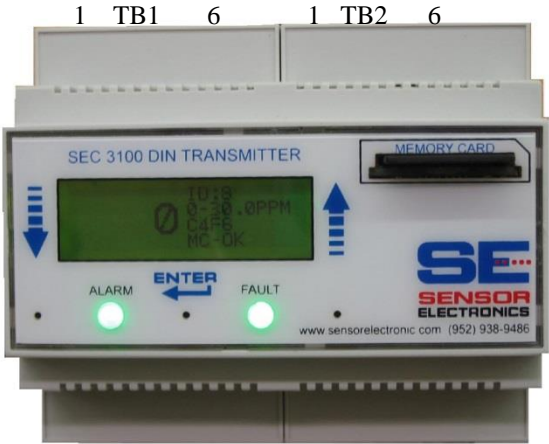

TB 5 Sensor

- 1 DC Common (Black)
- 2 + 24 VDC (Red)
- 3 4-
- 4 Communication (White)


Wiring TB 6 Power / Data Wiring

- 1 Data A
- 2 Data B
- 20 mA (Blue or Green) 3 Iso-Common
- 4 + 24 VDC Input Power
- 5 DC Common
- 6 4-20 mA Output

Housing Dimensions

3.54 (W) x 4.17 (L) x 2.28 (H) inches
{90 (W) x 106 (L) x 58 (H) mm}

SEC 3500-8 RELAY CONTROLLER

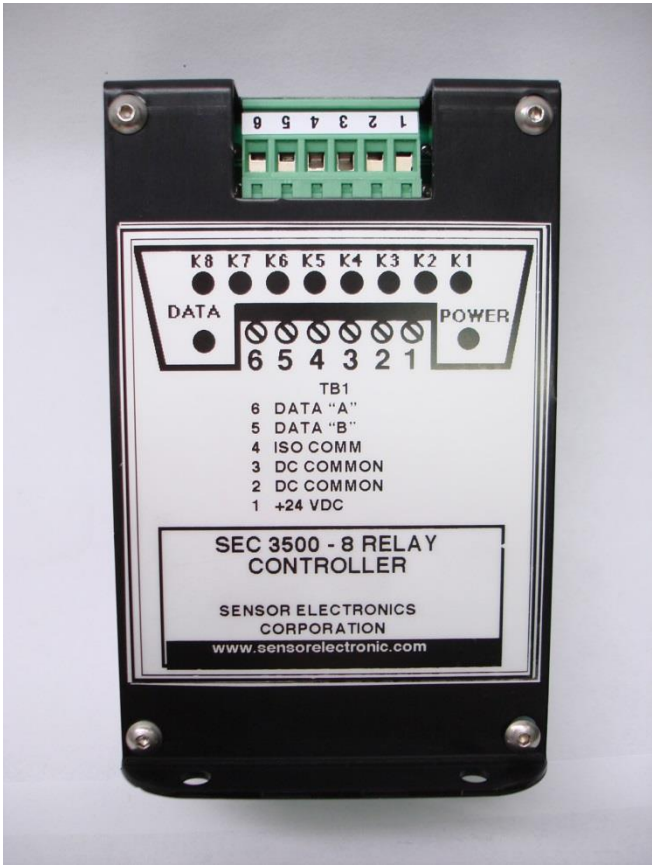

TB 1 (WIRING CONNECTION FOR POWER AND RS485)



TB 2 AND TB 3 (RELAY CONTACT WIRING)

SPECIFICATIONS

INPUT POWER: 10-30 VDC

RELAY CONTACT RATING: 8 AMPS @ 250 VAC OR 8 AMPS @ 30 VDC


COMMUNICATION: ISOLATED RS485 (MODBUS)

WEIGHT: SEC 3500 – 8 RELAY CONTROLLER (PN 1421999) 2 LBS
SEC 3500 – 16 RELAY CONTROLLER (PN 1422182) 3 LBS

POWER: SEC 3500 – 8 RELAY CONTROLLER 4 WATTS @ 24 VDC
SEC 3500 – 16 RELAY CONTROLLER 6 WATTS @ 24 VDC

SEC P/N: 1460014	
Rev / ECO: A / 000209	Page 17 of 26

TOP VIEW OF SEC 3500 - 8 RELAY CONTROLLER

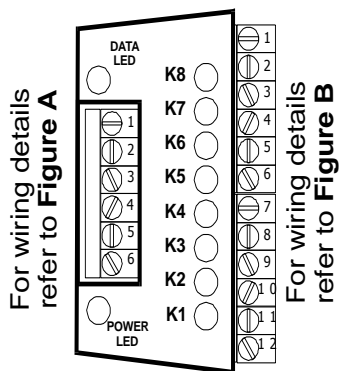

TOP VIEW OF SEC 3500 -16 RELAY CONTROLLER

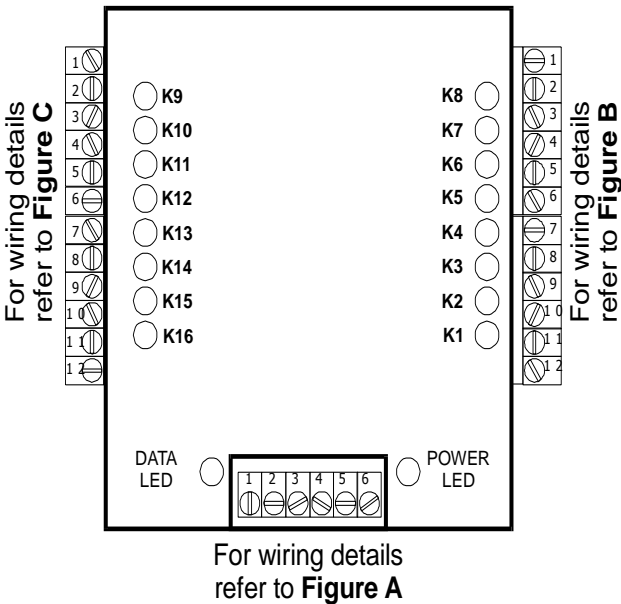


Figure A
(TB 1)

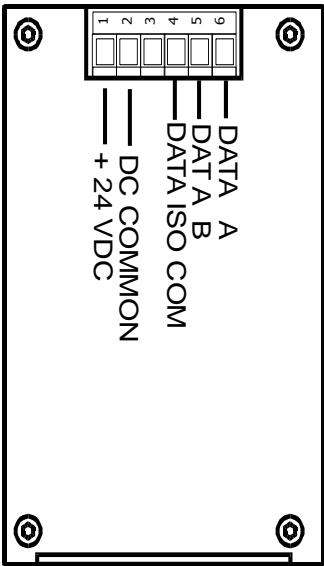


Figure B
TB 2 (K1-K4)
TB 3 (K5-K8)



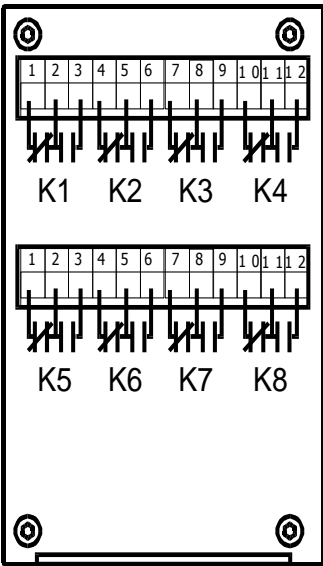



Figure C
TB 4 (K9-K12)
TB 5 (K13-K16)

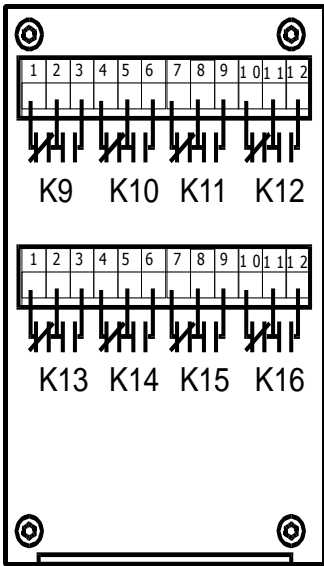

SEC 3500-8 RELAY CONTROLLER DIMENSIONS

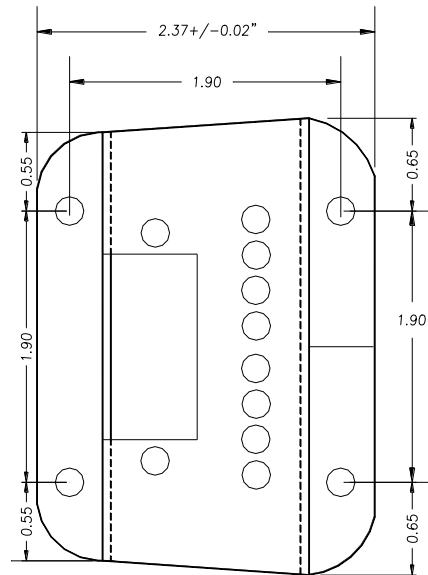

SEC 3500 – 16 RELAY CONTROLLER DIMENSIONS

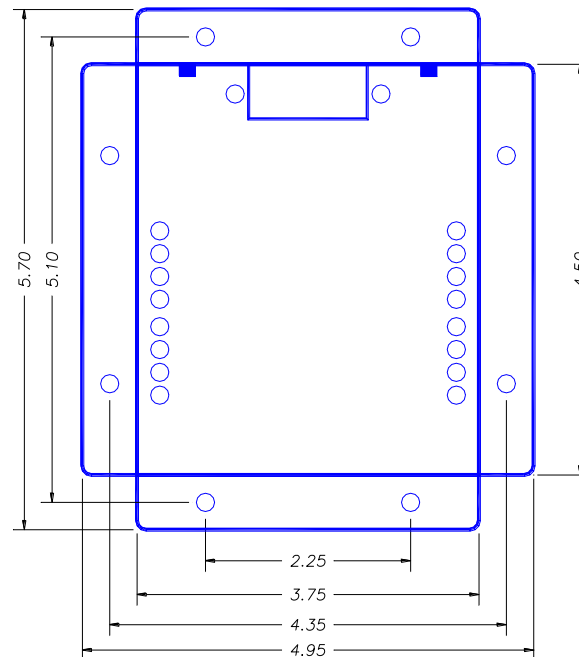




SEC 3100 ISO RS-485 Repeater Module

Operation

The SEC 3100 ISO RS-485 Repeater Module is used in conjunction with the SEC 3100 transmitters and the SEC 3500 HMI Operator Interface or other MODBUS RS-485 data highway systems. The SEC 3100 ISO RS-485 Repeater Module is used to extend the distance of the RS-485 network and increase the number of devices on the RS-485 network. The SEC 3100 ISO RS-485 Repeater Module provides 1500 volt isolation bidirectional data flow and transient suppression on the RS-485 data lines. An SEC 3100 ISO RS-485 Repeater Module should be installed for every 1000 feet of data highway cable or 32 network devices. The SEC 3100 ISO RS-485 Repeater Module is powered by 24 VDC and wired in line with the SEC RS-485 network devices. A typical wiring diagram is shown below:

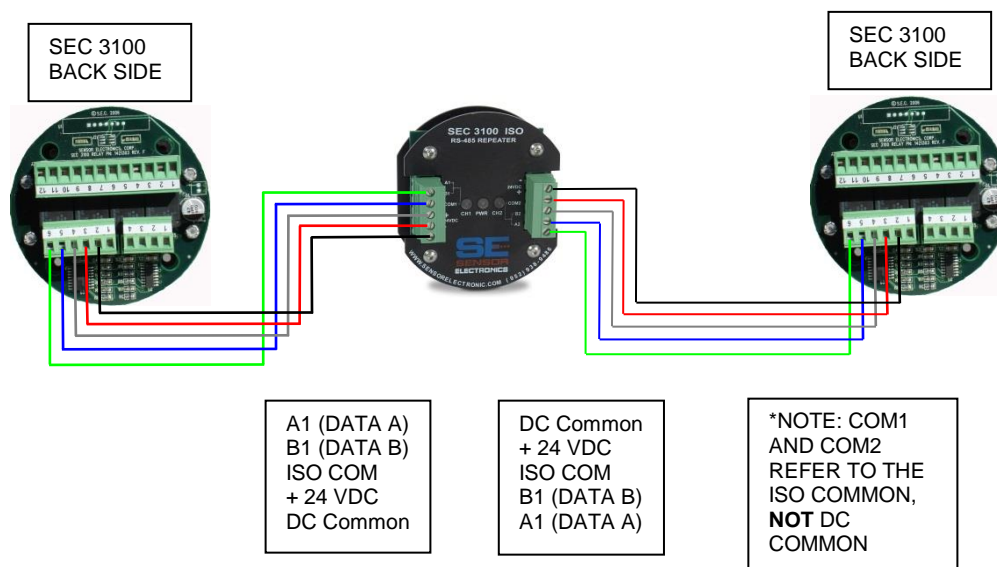

SPECIFICATIONS

Operating Voltage
18-32 VDC

Temperature Rating
-40° to + 70°C

Humidity
0-99% RH (non-condensing)

Operating Current
50mA @ 24VDC

Input / Output (digital)
MODBUS RTU

Part Number
3100-000-REPEAT

SEC P/N: 1460014	
Rev / ECO: A / 000209	Page 20 of 26



SEC 3100 AIM Analog Input Module

Operation

The SEC 3100 AIM is used in conjunction with the SEC 3100 explosion proof transmitter or SEC 3100 DIN transmitter. A non-SEC device with a conventional analog 4 - 20 mA output is wired to the SEC 3100 AIM. The SEC 3100 AIM receives a sourced 4 - 20 mA signal from the device, converts the analog signal into a digital signal compatible with the SEC 3100 transmitter. The SEC 3100 AIM is factory programmed with the following customer supplied variables:

Device Name
Range
Unit of Measure
Calibration Value

The SEC 3100 visually displays the variables on the LCD the same as if the SEC 3100 had an SEC gas detector connected. The SEC 3100 transmitter reports the foreign device status bidirectional to the SEC 3500 HMI Operator Interface via the MODBUS RS485 communication network. The SEC 3100 AIM can be installed in the SEC 3100 explosion proof transmitter housing using a taller window dome.

The SEC 3100 AIM accepts one device input. Examples of 4 - 20 mA devices that can be used with the SEC 3100 AIM are:

- Open Path Gas Detectors
- Fire Detectors
- Temperature Transmitter
- Pressure Transmitter
- Pvrolvzers

SPECIFICATIONS

Operating Voltage
18-32 VDC

Temperature Rating
-40° to + 70°C

Device Variable Characters

Device Name: 8
Range: 4
Unit of Measure: 4
Calibration Value: 4

Operating Current (No Sensor)
50mA @ 24VDC

Humidity
0-99% RH (non-condensing)

(Standard ASCII Characters)


Output (digital)
SEC SSP (Smart Sensor Protocol)

Input
Low Alarm
High Alarm

Part Number
3100-000-000-LIM

SEC P/N: 1460014	
Rev / ECO: A / 000209	Page 21 of 26


SEC 3100 AIM

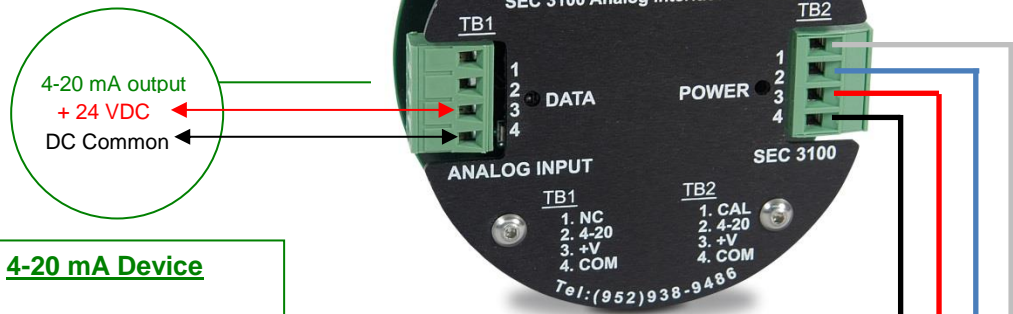

4-20 mA Device

Pressure Transmitter
Open Path Gas Detector
Pyrolyzer
Temperature Transmitter
Fire Detector

SEC 3100 Transmitter (back side)

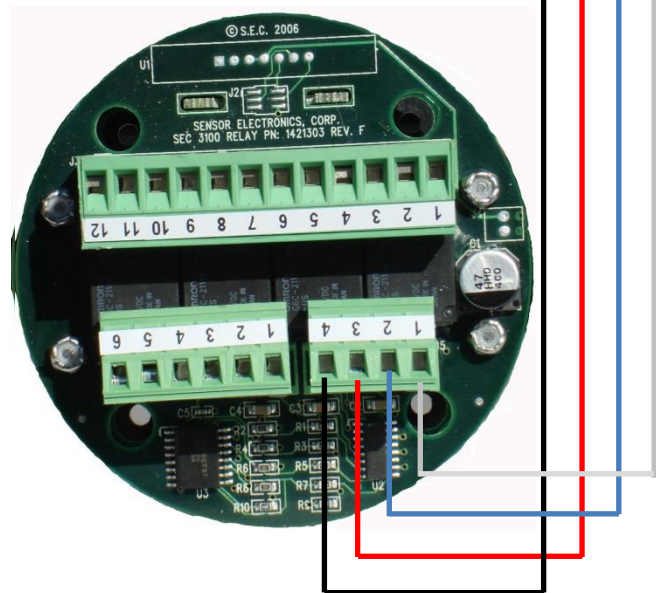

SEC 3100 Explosion Proof Transmitter

NOTE: Refer to the SEC 3100 Transmitter Instruction Manual for additional wiring connections.



SEC 3100 LIM Logic Input Module

Operation

The SEC 3100 LIM is used in conjunction with the SEC 3100 explosion proof transmitter or SEC 3100 DIN transmitter. A non-SEC device with normally open contacts is wired to the SEC 3100 LIM. The SEC 3100 LIM receives a Low and High contact closure from the device, converts the input signal into a digital signal compatible with the SEC 3100 transmitter. The SEC 3100 LIM is factory programmed with the following customer supplied variables:

Device Name
Range
Unit of Measure
Calibration Value

The SEC 3100 visually displays the variables on the LCD the same as if the SEC 3100 had an SEC gas detector connected. The SEC 3100 transmitter reports the foreign device status bidirectional to the SEC 3500 HMI Operator Interface via the MODBUS RS485 communication network. The SEC 3100 LIM can be installed in the SEC 3100 explosion proof transmitter housing using a taller window dome.

The SEC 3100 LIM accepts one device input for Low Alarm and High Alarm. Examples of switch contact devices that can be used with the SEC 3100 LIM are:

Open Path Gas Detectors
Fire Detectors
Temperature Switch
Pressure Switch

Specifications

Operating Voltage
18-32 VDC

Operating Current (No Sensor)
50mA @ 24VDC

Output (digital)
SEC SSP (Smart Sensor Protocol)

Temperature Rating
-40° to + 70°C

Humidity
0-99% RH (non-condensing)

Input (analog)
Impedance: 200 Ω
Max applied voltage: 32 VDC


Device Variable Characters
Device Name: 8
Range: 4
Unit of Measure: 4
Calibration Value: 4

(Standard ASCII Characters)

Part Number
3100-000-000-AIM


SEC P/N: 1460014	
Rev / ECO: A / 000209	Page 23 of 26

SEC 3100 LIM

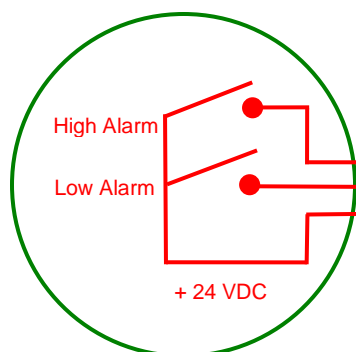

Switch Device


Pressure Switch
Open Path Gas Detector
Air Flow Switch
Temperature Switch
Fire Detector

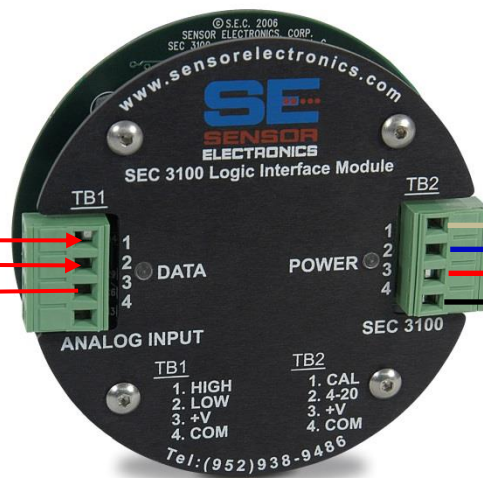

SEC 3100 Transmitter (back side)



SEC 3100 Explosion Proof Transmitter

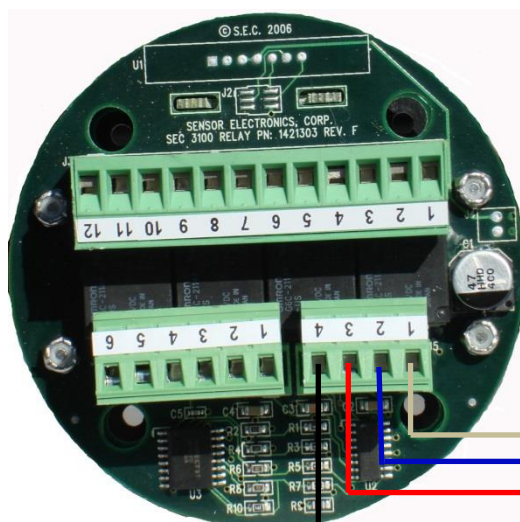

NOTE: Refer to the SEC 3100 Transmitter Instruction Manual for additional wiring connections.

VI. TESTING

In order to test the system and its functions, Navigate to the 3100 Manual Control page and begin a device Self-Test. This will simulate the sensor going into Low, Mid then High alarm. As the sensor goes through these alarms the 3500 screen should show the sensor going into alarm and respond accordingly (turn fan on/siren/lights/etc....) depending on the user's system settings and what the response to those alarms.

To keep an alarm on longer than the Self-Test runs or to leave an alarm on indefinitely, this can be done through the SEC 3500 OI. Navigate to the Relay Assignment page and set the desired relay to On. This will keep the alarm active until this is changed back.

VII. MAINTENANCE

Maintenance will need to be done by SEC personal. The maintenance needed is minimal. If issues arise and maintenance is needed, please contact Sensor Electronics at 952-938-9486.

SEC P/N: 1460014	
Rev / ECO: A / 000209	Page 26 of 26