



# SEC 3100 LIM Logic Input Module

# **Operation**

The SEC 3100 LIM is used in conjunction with the SEC 3100 explosion proof transmitter or SEC 3100 DIN transmitter. A non-SEC device with normally open contacts is wired to the SEC 3100 LIM. The SEC 3100 LIM receives a Low and High contact closure from the device, converts the input signal into a digital signal compatible with the SEC 3100 transmitter. The SEC 3100 LIM is factory programmed with the following customer supplied variables:

Device Name Range Unit of Measure Calibration Value

The SEC 3100 visually displays the variables on the LCD the same as if the SEC 3100 had an SEC gas detector connected. The SEC 3100 transmitter reports the foreign device status bidirectional to the SEC 3500 HMI Operator Interface via the MODBUS RS485 communication network. The SEC 3100 LIM can be installed in the SEC 3100 explosion proof transmitter housing using a taller window dome.

The SEC 3100 LIM accepts one device input for Low Alarm and High Alarm. Examples of switch contact devices that can be used with the SEC 3100 LIM are:

Open Path Gas Detectors Fire Detectors Temperature Switch Pressure Switch Air Flow Switch

#### **SPECIFICATIONS**

Operating Voltage 18-32 VDC

Operating Current (No Sensor)

50mA @ 24VDC

Output (digital)
SEC SSP (Smart Sensor Protocol)

**Temperature Rating** 

 $-40^{\circ}$  to +  $70^{\circ}$ C

Humidity

0-99% RH (non-condensing)

Input

Low Alarm High Alarm **Device Variable Characters** 

Device Name: 8


Range: 4

Unit of Measure: 4
Calibration Value: 4
(Standard ASCII Characters)

Part Number 3100-000-000-LIM


Sensor Electronics Corporation 5500 Lincoln Drive Minneapolis, Minnesota 55436 USA (T) 952.938.9486 (F) 952.938.9617 www.sensorelectronics.com

## **SEC 3100 EXPLOSION PROOF WIRING DIAGRAM**

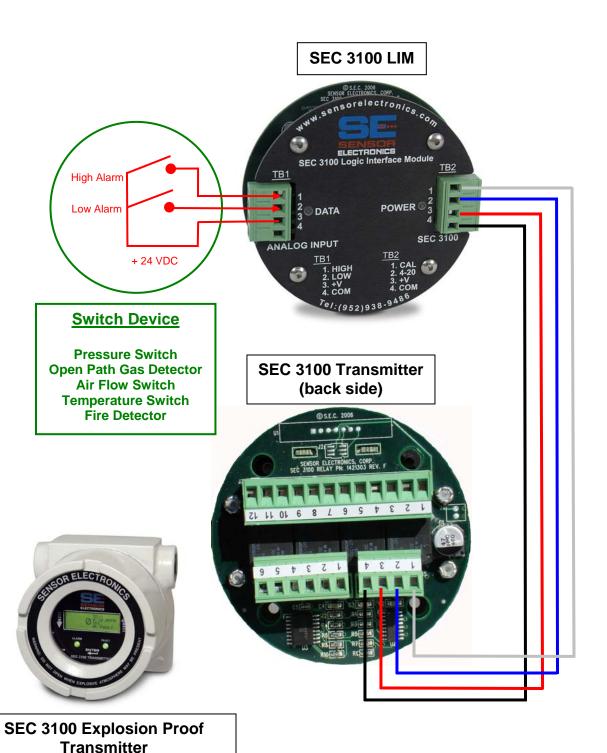

NOTE: Refer to the SEC 3100 Transmitter Instruction Manual for additional wiring connections.

#### **SEC 3100 DIN WIRING DIAGRAM**

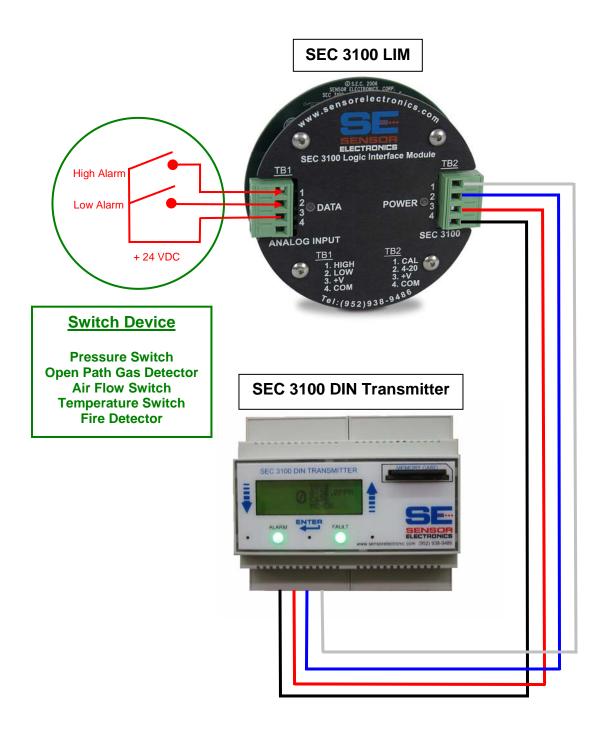

### **TB 5**

- 1 DC COMMON
- 2 +24 VDC
- 3 4 20 mA
- 4 Communication

NOTE: Refer to the SEC 3100 DIN Transmitter Instruction Manual for additional wiring connections.