


SEC 3120 Wiring

TB 1 Relay Wiring

- 1 FLT – NC
- 2 FLT – COM
- 3 FLT – NO
- 4 HI – NC
- 5 HI – COM
- 6 HI – NO

TB 2 Relay Wiring

- 1 MID – NC
- 2 MID – COM
- 3 MID – NO
- 4 LOW – NC
- 5 LOW – COM
- 6 LOW –NO

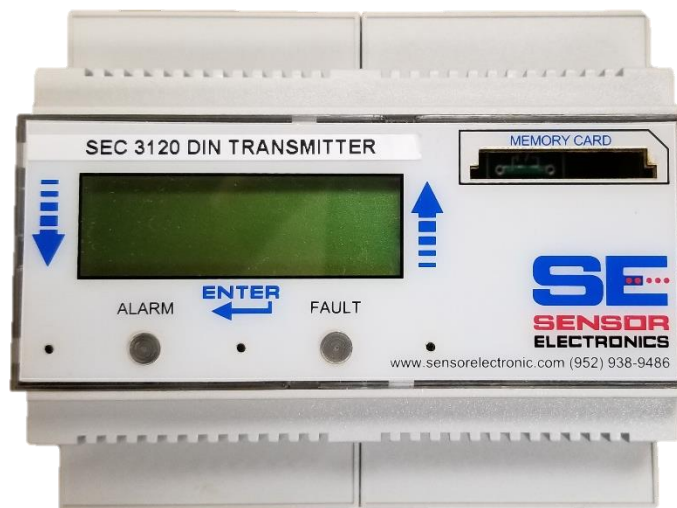

TB 3 Sensor Wiring

- 1 DC Common (Black)
- 2 + 24 VDC (Red)
- 3 4-20 mA (Blue or Green)
- 4 Communication (White)
- 1 DC Common (Black)
- 2 + 24 VDC (Red)
- 3 4-20 mA (Blue or Green)
- 4 Communication (White)

TB 4 Power / Data Wiring

- 1 +24 VDC
- 2 S1 4-20 mA out
- 3 DC Common
- 4 RS485 Data B
- 5 RS485 Data A
- 6 RS485 ISO Comm
- 7 S2 4-20 mA out

Housing Dimensions

3.54 (W) x 4.17 (L) x 2.28 (H) inches
{ 90 (W) x 106 (L) x 58 (H) mm }

SEC 3120 Wiring

TB 1 (P3)


TB 2 (P6)

1

6

1

6

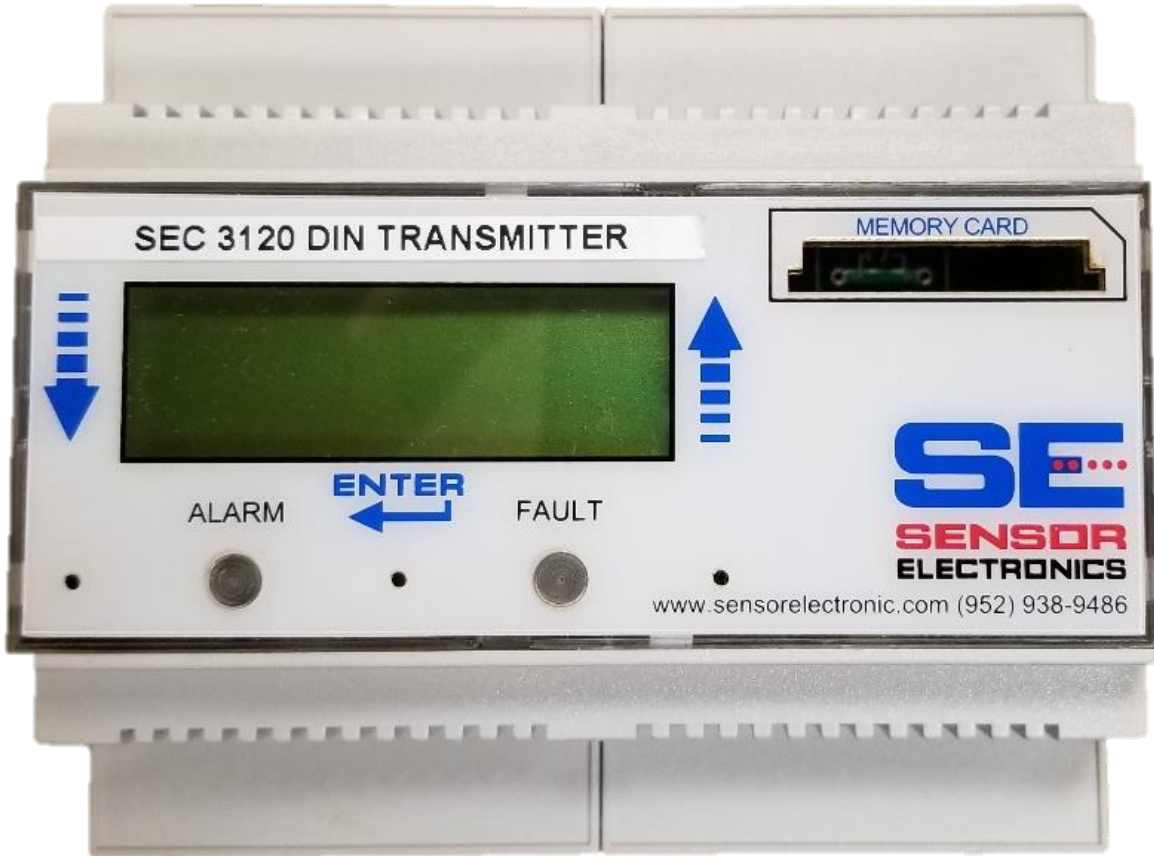

1

2

3

4

1

2

3

4

7

6

5

4

3

2

1

TB 3 (P1)

TB 4 (P5)